

Digital Thermometer

Unit Test carries two types of digital thermometer.

G 26/A - the probe is directly connected to the unit. Temperature range: -50°C to 250°C .

G 26/B - with 1 metre long probe cable that connected to the reading unit. Temperature range: -50°C to 150°C .



Dial Thermometer (Tel-Tru)

Stainless steel made, suitable to measure temperature of fresh mixed concrete and bituminous mixtures.

G 27/A Temperature range: 0° - 110°C .

G 27/B Temperature range: 0° - 250°C . Both types of dial thermometer selectable of length 5", 8" and 12" stem.



Glass Thermometer

G 28 Glass made, suitable for general laboratory use.

Temperature range: -10°C to 200°C

Rain Gauge

G 29 Copper made with 127mm diameter rim. Supplied with inner plastic can.


Soil Hydrometer

G 30 Glass made with range 0.995 to 1.038g/ml.

Stop Watch

G 31/A Digital type with accuracy 0.1 second.

G 31/B Mechanical dial type with accuracy 0.1 second.

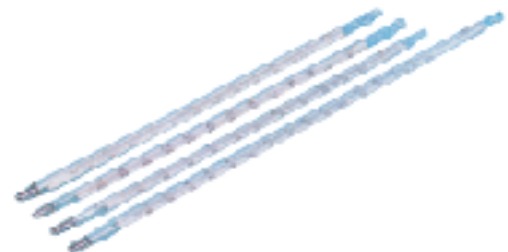

Vernier Calipers

G 32 Range: 0-152mm x 0.02mm

G 32/A Range: 0-205mm x 0.02mm

G 33 Digital Caliper Range: 0-205mm x 0.02mm



Heat Resistance Glove

G 34 Heat resistance glove

G 35 Rubber glove

