

MIXING AND MOULDING EQUIPMENTS

D 5

Motorised Jolting table apparatus, EN - 196-1

Used to compact cement mortar prism mould 40.1 x 40 x 160mm and drop height of 15mm with 60 drop per minute. Manufactured according to EN 196-1 requirement standard. The control panel fixed with main switch, auto digital counter and push button safety switch.

■ D 5



D 6

3-gang Mould 40.1mm x 40mm x 160mm, EN 196-1


These mould is made from Hardness Steel and all surface are grinded and marked with identification number for correct assembly. It meets EN 196-1 Standard requirement. Weight: 9.5kg

ACCESSORIES:

D 6/A Feed Hopper, EN 196-1

D 6/B □ Large Scraper, EN 196-1

D 6/C Small Scraper, EN 196-1

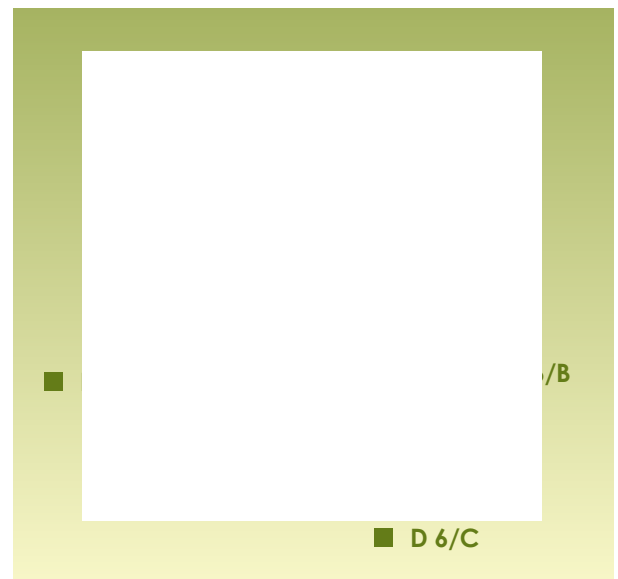

D 7

Unit Test Automatic / Manual Mortar Mixer, EN 196-1, EN 196-3 and BS 3892

Used for mixing cement mortar, 5 litres capacity Stainless Steel Bowl with Stainless Steel Beater. The beater revolves about its axis and is driven around the bowl in planetary motion. Two speed of mixer blade can be selected (Auto or Manual). Low speed is 140rpm for blade and 62rpm for planetary movement. High speed is 285rpm and 125 rpm respectively. The unit fixed with Automatic Sand Dispenser which mean sand will be automatically fill into the mixing bowl after a period of 30 second, after 60 second, it will automatically change to High Speed. The digital timer is displayed the mixing programe (Scheme) accordance to EN 196-1 requirement. Also can be manually operated control of low and high speed by sensor touch key pad.

ACCESSORIES AND SPARES:

D 7/A □□□ Stainless Steel beater, with fitting accordance to EN-196-1

D 7/B □□□ Stainless Steel bowl, 5 litres capacity accordance to EN-196-1

D 7/C □□□ Scraper made from plastic 200mm long

